

UFT 100

NEW



OPEN TOP COOLER

- *Adjustable thermostat*
- *Automatic defrosting*
- *Electronic controller*
- *Solid construction*
- *Easy change of branding and customising*

OPEN TOP COOLER



UFT 100
Standard



UFT 100
Customizing

Model		UFT 100
Temperature range	[°C]	+2 ... +12
Climate class		3 (25°C / 60% RH)
Volume Net / Gross	[l]	103 / 110
Weight Net / Gross	[kg]	29 / 31
Internal dimension (WxDxH)	[mm]	520x320x570
External dimension (WxDxH)	[mm]	660x460x970
Ext. dimension with packing (WxDxH)	[mm]	700x500x1350
Loadability: 20 cont./40 cont./13,6 truck	[pcs]	64 / 128 / 144
Number of Can (330 ml)/PET Bottle (500ml)	[pcs]	144 / 84
Power Supply	[V / Hz]	230 / 50
Refrigerant		R134a



illuminated display



high protection by
powder-coated steel

USS 220 DTKL / USS 220 DTK / USS 220 DTK SD
USS 300 DTKL / USS 300 DTK / USS 300 DTK SD



USS 220 DTKL / USS 220 DTK / USS 220 DTK SD
USS 300 DTKL / USS 300 DTK / USS 300 DTK SD

SINGLE DOOR BOTTLE COOLERS

- *Adjustable shelves with price holder or sticker*
- *Illuminated canopy (with or w/o)*
- *Internal lighting for the excellent product visibility*
- *Tempered glass door*
- *Automatic defrost*
- *Free maintenance wire condenser for the less service cost*
- *Reversible door*
- *Self-closing door*
- *Available with door lock*
- *2 adjustable feet for levelling and 2 castors*

SINGLE DOOR BOTTLE COOLERS



USS 220 DTKL



USS 220 DTK



USS 220 DTK SD



USS 300 DTKL



USS 300 DTK



USS 300 DTK SD

Options



Door handle



Door handle



Door handle



Self closing lid



Reverse lid



Color inner liner



Forced shelf



Analog Thermometer



Digital Thermometer



Fan switch



Door lock




Price holder



Color plastic parts



Wheels



Color front grill

- 2 Sides sticker
- Analog & digital thermometer
- Branded shelf
- Canopy branding
- Color body

- Color door frame
- Color inner liner
- Color plastic parts
- Fan switch

- Forced shelf
- Different handles
- Glass sticker
- Price tag/holder/sticker

- Lock with keys
- Plastic door frame
- Reverse lid
- Self closing door

Model		USS 220 DTKL	USS 220 DTK	USS 220 DTK SD	USS 300 DTKL	USS 300 DTK	USS 300 DTK SD
Temperature range	[°C]	+1 ... +10	+1 ... +10	+1 ... +10	+1 ... +10	+1 ... +10	+1 ... +10
Climate class		4 (30°C / 55% RH)	4 (30°C / 55% RH)	4 (30°C / 55% RH)	4 (30°C / 55% RH)	4 (30°C / 55% RH)	4 (30°C / 55% RH)
Volume Net / Gross	[l]	190 / 215	190 / 215	190 / 215	260 / 290	260 / 290	260 / 290
Weight Net / Gross	[kg]	61 / 68	58 / 65	52 / 58	74 / 80	68 / 74	59 / 65
Internal dimension (WxDxH)	[mm]	505x462x1025	505x462x1025	505x462x1025	505x462x1350	505x462x1350	505x462x1350
External dimension (WxDxH)	[mm]	595x640x1435	595x640x1310	595x640x1310	595x640x1780	595x640x1640	595x640x1640
Ext. dim. with packing (WxDxH)	[mm]	665x685x1550	665x685x1410	665x685x1410	665x685x1880	665x685x1740	665x685x1740
Loadability: 20' cont. / 40' cont. / 13,6 truck	[pcs]	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60
Shelf	[pcs]	3	3	3	4	4	4
Number of Cans (330 ml)/Bottle (500 ml)	[pcs]	224 / 100	224 / 100	224 / 100	331 / 156	331 / 156	331 / 156
Facing Cans (330 ml)/PET Bottle (500 ml)	[pcs]	7 / 7	7 / 7	7 / 7	7 / 7	7 / 7	7 / 7
Power Supply	[V / Hz]	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
Refrigerant		R134a	R134a	R134a	R134a	R134a	R134a

USS 374 DTKL / USS 374 DTK / USS 374 DTK SD
USS 374 DIKL / USS 374 DIK / USS 374 DTKLB
USS 374 GST / USS 374 GST SD



USS 374 DTKL / USS 374 DTK / USS 374 DTK SD
USS 374 DIKL / USS 374 DIK / USS 374 DTKLB
USS 374 GST / USS 374 GST SD

SINGLE DOOR BOTTLE COOLERS

- 5 adjustable shelves with price holder or sticker
- Special interior design allows large product capacity
- Illuminated canopy (with or w/o)
- Internal lighting for the excellent product visibility
- Tempered glass door
- Available with ECO-friendly refrigerant R600a and EMD (Electronic Management Device) for the reduction of energy consumption appr. 50 %
- Automatic defrost
- Free maintenance wire condenser for the less service cost
- Reversible door
- Self-closing door
- Available with door lock
- 2 adjustable feet for levelling and 2 castors
- Forced air circulation for the short pull down time

SINGLE DOOR BOTTLE COOLERS



USS 374 DTKL

USS 374 DTK

USS 374 DTK SD

USS 374 DIKL

USS 374 DIK

USS 374 DTKLB

USS 374 GST

USS 374 GST SD

Options



Door handle



Door handle



Door lock



Self closing lid



Wheels



Color inner liner



Door handle



Analog Thermometer



Digital Thermometer



Fan switch



Price holder



Forced shelf

- 2 Sides sticker
- Analog & digital thermometer
- Branded shelf
- Canopy branding
- Color body

- Color door frame
- Color inner liner
- Color plastic parts
- Fan switch
- Forced shelf

- Different handles
- Glass sticker
- Price tag / holder / sticker
- Lock with keys

- Plastic door frame
- Reverse lid
- Self closing door
- 4 Castors

Model		USS 374 DTKL	USS 374 DTK	USS 374 DTK SD	USS 374 DIKL	USS 374 DIK	USS 374 DTKLB	USS 374 GST	USS 374 GST SD
Temperature range	[°C]	+1...+10	+1...+10	+1...+10	+1...+10	+1...+10	+1...+10	+1...+10	+1...+10
Climate class		4 (30°C/55%RH)	4 (30°C/55%RH)	4 (30°C/55%RH)	4 (30°C/55%RH)	4 (30°C/55%RH)	4 (30°C/55%RH)	4 (30°C/55%RH)	4 (30°C/55%RH)
Volume Net / Gross	[l]	345 / 372	345 / 372	345 / 372	345 / 372	345 / 372	345 / 372	345 / 372	345 / 372
Weight Net / Gross	[kg]	78 / 85	74 / 81	64 / 70	79 / 86	75 / 81	83 / 90	80 / 85	70 / 75
Internal dimension (WxDxH)	[mm]	505x462x1555	505x462x1555	505x462x1555	505x462x1555	505x462x1555	505x462x1555	505x462x1555	505x462x1555
External dimension (WxDxH)	[mm]	595x640x1980	595x640x1840	595x640x1840	595x640x1980	595x640x1840	595x640x1980	595x620x1985	595x620x1985
Ext. dim. with packing (WxDxH)	[mm]	665x685x2080	665x685x1940	665x685x1940	665x685x2080	665x685x1940	680x720x2080	665x685x1940	665x685x1940
Loadability: 20' cont. / 40' cont. / 13.6 truck	[pcs]	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60
Shelf	[pcs]	5	5	5	5	5	5	5	5
Number of Cans (330 ml)/PET Bottle (500 ml)	[pcs]	471 / 238	471 / 238	471 / 238	471 / 238	471 / 238	471 / 238	471 / 238	471 / 238
Facing Cans (330 ml) / PET Bottle (500 ml)	[pcs]	7 / 7	7 / 7	7 / 7	7 / 7	7 / 7	7 / 7	7 / 7	7 / 7
Power Supply	[V / Hz]	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
Refrigerant		R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a	R134a / R600a

USS 440 DTKL / USS 440 DTKLB



USS 440 DTKL / USS 440 DTKLB

SINGLE DOOR BOTTLE COOLERS

- 5 adjustable shelves with price holder
- Special interior design allows large product capacity
- Illuminated canopy
- Internal vertical lighting for the excellent product visibility
- Tempered glass door
- Available with ECO-friendly refrigerant R600a and EMD (Electronic Management Device) for the reduction of energy consumption appr. 50 %
- Automatic defrost
- Reversible door
- Available with door lock
- 2 adjustable feet for levelling and 2 castors

SINGLE DOOR BOTTLE COOLERS



USS 440 DTKL
Standard



USS 440 DTKLB
Standard



USS 440 DTKL
Customizing



USS 440 DTKLB
Customizing


Options



Door Handle



Door Handle



Door Handle



Analog Thermometer



Digital Thermometer



Price Holder



Fan Switch



Self Closing Lid



Reverse Lid



Door Lock



Forced Shelf



Color Inner Liner



Color Plastic Parts



Wheels

- 2 Sides sticker
- Analog & digital thermometer
- Branded Shelf
- Canopy branding
- Color body
- Color door frame

- Color inner liner
- Color plastic parts
- Fan Switch
- Forced shelf
- Different handles
- Glass Sticker

- Price tag/holder/sticker
- Lock with keys
- Plastic door frame
- Reverse Lid
- Self closing door

Model		USS 440 DTKL	USS 440 DTKLB
Temperature range	[°C]	+1 ...+10	+1 ...+10
Climate class		4 (30°C / 55% RH)	4 (30°C / 55% RH)
Volume Net / Gross	[l]	374 / 438	374 / 438
Weight Net / Gross	[kg]	100 / 110	106 / 116
Internal dimension (WxDxH)	[mm]	585x495x1515	585x495x1515
External dimension (WxDxH)	[mm]	680x665x2090	680x660x2090
Ext. dim. with packing (WxDxH)	[mm]	760x720x2207	760x725x2207
Loadability: 20' cont. /40' cont. /13,6 truck	[pcs]	24 / 51 / 57	24 / 51 / 57
Shelf	[pcs]	5	5
Number of Cans (330 ml) / PET Bottle (500 ml)	[pcs]	504 / 240	504 / 240
Facing Cans (330 ml) / PET Bottle (500 ml)	[pcs]	8 / 8	8 / 8
Power Supply	[V / Hz]	230 / 50	230 / 50
Refrigerant		R134a / 600a	R134a / 600a

USS 690 DTKL



USS 690 DTKL

SINGLE DOOR BOTTLE COOLERS

- 5 adjustable shelves with price holder
- Special interior design allows large product capacity
- Illuminated canopy
- Internal lighting for the excellent product visibility
- Tempered glass door
- Available with ECO-friendly refrigerant R290 and EMD (Electronic Management Device) for the reduction of energy consumption appr. 30 %
- Automatic defrost
- Reversible door
- Available with door lock
- Adjustable feet for levelling
- 4 strong castors

SINGLE DOOR BOTTLE COOLERS



USS 690 DTKL
Standard



USS 690 DTKL
Customizing



USS 690 DTKL
Customizing



USS 690 DTKL
Customizing


Options



Door Handle



Door Handle



Door Handle



Self Closing Lid



Reverse Lid



Color Inner Liner



Forced Shelf



Analog Thermometer



Digital Thermometer



Fan Switch



Door Lock



Price Holder



Color Plastic Parts

- 2 Sides sticker
- Analog & digital thermometer
- Branded Shelf
- Canopy branding

- Color body
- Color door frame
- Color inner liner
- Color plastic parts

- Fan Switch
- Forced shelf
- Different handles
- Glass Sticker
- Price tag/holder/sticker

- Lock with keys
- Plastic door frame
- Reverse Lid
- Self closing door
- 4 Castors

Model

USS 690 DTKL

Temperature range	[°C]	+1 ...+10
Climate class		4 (30°C / 55% RH)
Volume Net / Gross	[l]	495 / 657
Weight Net / Gross	[kg]	123 / 136
Internal dimension (WxDxH)	[mm]	702x555x1682
External dimension (WxDxH)	[mm]	780x705x2080
External dimension with packing (WxDxH)	[mm]	855x780x2220
Loadability: 20 cont. / 40 cont./ 13,6 truck	[mm]	18 / 42 / 48
Shelf	[pcs]	5
Number of Cans (330 ml) / PET Bottle (500 ml)	[pcs]	770 / 385
Facing Cans (330 ml) / PET Bottle (500 ml)	[pcs]	10 / 11
Power Supply	[V / Hz]	230 / 50
Refrigerant		R134a / R290

USS 748 DIKL / USS 980 DIKL
USS 1000 DIKL / USS 1200 DIKL



USS 748 DIKL / USS 980 DIKL
USS 1000 DIKL / USS 1200 DIKL

DOUBLE DOOR BOTTLE COOLERS

- Wire shelves with price holder or stickers
- Illuminated canopy
- Internal lighting for the excellent product visibility
- Doubled tempered glass door
- Automatic defrost
- Available with door lock
- Adjustable feet for levelling
- Analog thermometer or digital thermometer
- Available with ECO-friendly refrigerants R600a and R290 and EMD (Electronic Management Device) for the reduction of energy consumption appr. 40%

DOUBLE DOOR BOTTLE COOLERS



USS 748 DIKL



USS 980 DIKL



USS 1000 DIKL



USS 1200 DIKL

Options



Analog Thermometer



Digital Thermometer



White Inner Liner

- 2 Sides sticker
- Analog & digital thermometer
- Canopy branding
- Color body

- Color door frame
- Color inner liner
- Color plastic parts
- Forced shelf

- Lock with keys
- Self closing door
- Hinged doors

Model		USS 748 DIKL	USS 980 DIKL	USS 1000 DIKL	USS 1200 DIKL
Temperature range	[°C]	+1 ... +10	+1 ... +10	+1 ... +10	+1 ... +10
Climate class		4 (30°C / 55% RH)	4 (30°C / 55% RH)	4 (30°C / 55% RH)	4 (30°C / 55% RH)
Volume Net / Gross	[l]	690 / 744	740 / 975	565 / 760	690 / 930
Weight Net / Gross	[kg]	160 / 175	170 / 186	162 / 176	170 / 185
Internal dimension (WxDxH)	[mm]	2x(505x462x1555)	1000x652x1533	890x572x1533	1090x572x1533
External dimension (WxDxH)	[mm]	1190x640x1980	1110x820x2010	1000x740x2010	1200x740x2010
External dim. with packing (WxDxH)	[mm]	1270x720x2080	1180x920x2120	1040x780x2125	1240x780x2125
Loadability: 20' cont. /40' cont. /13,6 truck	[pcs]	13 / 27 / 31	12 / 26 / 30	14 / 30 / 39	11 / 24 / 33
Shelf	[pcs]	10	4+1 bottom shelf	4+1 bottom shelf	4+1 bottom shelf
Number of Cans (330 ml)/PET Bottle (500 ml)	[pcs]	882 / 470	1182 / 595	910 / 455	1120 / 560
Facing Cans (330 ml)/PET Bottle (500 ml)	[pcs]	14 / 14	15 / 15	13 / 13	16 / 16
Power Supply	[V / Hz]	230 / 50	230 / 50	230 / 50	230 / 50
Refrigerant		R134a	R134a/R600a/R290	R134a/R600a/R290	R134a/R600a/R290

USS 95 DTKL SZ / USS 374 DTKL SZ
USS 374 DTKL SD SZ / USS 440 DTKL SZ
USS 440 DTKL SD SZ



USS 95 DTKL SZ / USS 374 DTKL SZ
USS 374 DTKL SD SZ / USS 440 DTKL SZ
USS 440 DTKL SD SZ

SUB-ZERO BOTTLE COOLERS

- Adjustable shelves with price holder or sticker
- Special interior design allows large product capacity
- Illuminated canopy with digital temperature display
- Internal lighting for the excellent product visibility
- Tempered glass door
- Automatic defrost
- Reversible door
- Self-closing door
- Available with door lock

SUB-ZERO BOTTLE COOLERS



USS 95 DTKL SZ



USS 374 DTKL SZ



USS 374 DTKL SZ SD



US SZS 440 DTKL SZ



USS 440 DTKL SZ SD


Options



Door Handle



Door Handle



Door Handle



Fan Switch




Self Closing Lid



Reverse Lid



Door Lock



Forced Shelf



Price Holder



Wheels

- 2 Sides sticker
- Digital thermometer
- Branded Shelf
- Canopy branding

- Color body
- Color door frame
- Color inner liner
- Color plastic parts

- Fan Switch
- Forced shelf
- Different handles
- Glass Sticker
- Price tag/holder/sticker

- Lock with keys
- Plastic door frame
- Reverse Lid
- Self closing door
- 4 Castors

Model		USS 95 DTKL SZ	USS 374 DTKL SZ	USS 374 DTKL SZ SD	USS 440 DTKL SZ	USS 440 DTKL SZ SD
Temperature range	[°C]	-2,5 ... +1	-2,5 ... +1	-2,5 ... +1	-2,5 ... +1	-2,5 ... +1
Climate class		4 (30°C / 55% RH)	4 (30°C / 55% RH)	4 (30°C / 55% RH)	4 (30°C / 55% RH)	4 (30°C / 55% RH)
Volume Net / Gross	[l]	55 / 85	345 / 372	345 / 372	374 / 438	374 / 438
Weight Net / Gross	[kg]	42 / 47	80 / 87	70 / 77	111 / 122	101 / 112
Internal dimension (WxDxH)	[mm]	410x380x550	505x462x1555	505x462x1555	585x495x1515	585x495x1515
External dimension (WxDxH)	[mm]	480x520x840	595x640x1980	595x640x1980	680x665x2090	680x660x2090
Ext. dim. with packing (WxDxH)	[mm]	580x600x960	665x685x2080	665x685x2080	760x720x2207	760x725x2207
Loadability: 20' cont. / 40' cont. / 13,6 truck	[pcs]	80 / 160 / 276	24 / 54 / 60	24 / 54 / 60	24 / 51 / 57	24 / 51 / 57
Shelf	[pcs]	2	5	5	5	5
Number of Cans (330 ml) / PET Bottle (500 ml)	[pcs]	75 / 40	471 / 238	471 / 238	504 / 240	504 / 240
Facing Cans (330 ml) / PET Bottle (500 ml)	[pcs]	5 / 5	7 / 7	7 / 7	8 / 8	8 / 8
Power Supply	[V / Hz]	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
Refrigerant		R134a	R134a	R134a	R134a	R134a

USS 220 DTK-RETRO/USS 300 DTK-RETRO
USS 700 DTKL-RETRO



USS 220 DTK-RETRO/USS 300 DTK-RETRO
USS 700 DTKL-RETRO

PREMIUM COOLERS

PREMIUM COOLERS



USS 220 DTK-RETRO



USS 300 DTK-RETRO



USS 700 DTKL-RETRO

Model		USS 220 DTKG - RETRO	USS 300 DTK - RETRO	USS 700 DTKL - RETRO
Temperature range	[°C]	+1/+10	+1/+10	+1/+10
Climate class		4	4	PEPSI HA (32C /65%)
Volume Net / Gross	[l]	190 / 215	260 / 290	577 / 666
Weight Net / Gross	[kg]	64 / 71	80 / 88	140 / 132
Internal dimension (WxDxH)	[mm]	505x462x1020	500x445x1355	681x555x1790
External dimension (WxDxH)	[mm]	595x662x1426	595x665x1720	780x755x2130
External dim. with packing (WxDxH)	[mm]	665x685x1500	665x685x1820	800x770x2210
Loadability: 20' cont. /40' cont. /13,6 truck	[pcs]	24 / 54 / 60	24 / 54 / 60	
Shelf	[pcs]	3	4	5
Number of Cans (330 ml)/PET Bottle (500 ml)	[pcs]	224 / 100	331 / 156	960 / 444
Facing Cans (330 ml)/PET Bottle (500 ml)	[pcs]	7 / 7	7 / 7	8 / 8
Power Supply	[V / Hz]	230/50	230/50	230/50
Refrigerant		R600a	R134a	R134a

USD 374 GDB / USD 374 GD
USD 374 SD



USD 374 GDB / USD 374 GD
USD 374 SD

WINE COOLERS

- *Excellent display for wine*
- *Adjustable Temperature Range +5 ... +20°C for all wine types*
- *Polyurethane insulated solid lid or heated, tempered glass lid with aluminium frame*
- *5 wooden shelves and brown or bordeaux Internal material*
- *Carbon filters to absorb smell*

WINE COOLERS



USD 374 GDB



USD 374 GD



USD 374 GD



USD 374 SD

Options



Color inner liner



Special Shelf



Special Shelf



Color plastic parts

Model		USD 374 GDB	USD 374 GD	USD 374 SD
Temperature range	[°C]	+5... +20	+5... +20	+5... +20
Climate class		4 (30°C / 55% RH)	4 (30°C / 55% RH)	4 (30°C / 55% RH)
Volume Net / Gross	[l]	345 / 372	345 / 372	345 / 372
Weight Net / Gross	[kg]	74 / 83	74 / 83	74 / 83
Internal dimension (WxDxH)	[mm]	505x462x1555	505x462x1555	505x462x1555
External dimension (WxDxH)	[mm]	595x640x1840	595x640x1840	595x640x1840
Ext. dim. with packing (WxDxH)	[mm]	665x685x1940	665x685x1940	665x685x1940
Loadability: 20' cont. /40' cont. /13,6 truck	[pcs]	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60
Shelf	[pcs]	5	5	5
Power Supply	[V / Hz]	230 / 50	230 / 50	230 / 50
Refrigerant		R134a	R134a	R134a

UOF 1 / UOF 3

NEW



OPEN FRONT COOLERS

- *Environment-friendly design*
- *Reliable refrigeration systems*
- *Energy-economizing electronic controller*
- *Automatic defrost*
- *High impact vertical lighting*
- *Panorama end wall glazing*
- *Adjustable shelves*
- *Night blind, hand operated*

OPEN FRONT COOLERS



UOF 1



UOF 3

Model		UOF 1	UOF 3
Temperature range	[°C]	+2 ... +12	+2 ... +12
Climate class		3 (25°C / 60% RH)	3 (25°C / 60% RH)
Volume Net / Gross	[l]	305 / 670	750 / 1100
Weight Net / Gross	[kg]	213 / 225	300 / 318
Internal dimension (WxDxH)	[mm]	710x630x1400	1170x630x1400
External dimension (WxDxH)	[mm]	800x975x2120	1257x975x2120
Ext. dimension with packing (WxDxH)	[mm]	870x1080x2200	1330x1080x2200
Loadability: 20 cont./40 cont./13,6 truck	[kg]	14 / 28 / 32	8 / 18 / 23
Shelf	[pcs]	4 + 1 bottom shelf	4 + 1 bottom shelf
Shelf dimension (WxD)	[mm]	706x500	1166x500
Number of Cans (330 ml)/PET Bottle (500 ml)	[mm]	700 / 385	1190 / 630
Facing Cans (330 ml)/PET Bottle (500 ml)	[pcs]	10 / 11	17 / 18
Power Supply	[V / Hz]	230 / 50	230 / 50
Refrigerant		R404a	R404a

UFR 370 GD / UFR 370 GDL / UFR 370 SD
UFR 370 GST GD / UFR 370 GST SD
UFR 440 GDL / UFR 440 GDLB



UFR 370 GD / UFR 370 GDL / UFR 370 SD
UFR 370 GST GD / UFR 370 GST SD
UFR 440 GDL / UFR 440 GDLB

UPRIGHT FREEZERS

- *Temperature range: -12...-22°C*
- *Static air and manual defrost*
- *Excellent display of ice cream or frozen foods
for glass door models*
- *Internal lighting for the excellent product visibility*
- *Wide spaces between shelves allows to store large
product capacity*
- *Illuminated canopy (with or w/o)*
- *Tempered glass door*

UPRIGHT FREEZERS



UFR 370 GDL

UFR 370 GD

UFR 370 SD

UFR 370 GST GD

UFR 370 GST SD

UFR 440 GDL

UFR 440 GDLB

Options



Branding

- 2 Sides sticker
- Analog & digital thermometer
- Branded Shelf
- Canopy branding
- Color body

- Color door frame
- Color inner liner
- Color plastic parts
- Fan Switch
- Glass Sticker
- Price tag / holder

- Lock with keys
- Reverse Lid
- Self closing door
- 4 Castors
- Integrated handle

Model		UFR 370 GDL	UFR 370 GD	UFR 370 SD	UFR 370 GST GD	UFR 370 GST SD	UFR 440 GDL	UFR 440 GDLB
Temperature range	[°C]	-12 ... -22	-12 ... -22	-12 ... -22	-12 ... -22	-12 ... -22	-12 ... -22	-12 ... -22
Climate class		4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)
Volume Net / Gross	[l]	270 / 300	270 / 300	270 / 300	270 / 300	270 / 300	353 / 480	353 / 480
Weight Net / Gross	[kg]	96 / 106	92 / 102	70 / 80	95 / 105	85 / 95	117 / 130	117 / 130
Internal dimension (WxDxH)	[mm]	475x440x1550	475x440x1550	475x440x1550	475x440x1555	475x440x1555	577x495x1684	577x495x1684
External dimension (WxDxH)	[mm]	595x540x1965	595x640x1840	595x640x1840	595x622x1842	595x622x1842	680x655x2090	680x655x2090
Ext. dim. with packing (WxDxH)	[mm]	680x710x1990	680x710x1950	680x710x1950	655x685x1950	655x685x1950	760x705x2207	760x720x2207
Loadability: 20' cont. / 40' cont. / 13,6 truck	[pcs]	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 54 / 60	24 / 51 / 57	24 / 51 / 57
Shelf	[pcs]	6	6	6	6	6	5	5
Power Supply	[V / Hz]	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
Refrigerant		R404a	R404a	R404a	R404a	R404a	R404a	R404a

NEW

BODRUM 1850 CE CL-1850 CE FR-1850 CE CL/FR
BODRUM 1850 CL - 1850 FR - 1850 CL/FR
BODRUM 2100 CL - 2100 FR - 2100 CL/FR
BODRUM 2500 CL - 2400 FR - 2500 CL/FR



BODRUM 1850 CE CL-1850 CE FR-1850 CE CL/FR
BODRUM 1850 CL - 1850 FR - 1850 CL/FR
BODRUM 2100 CL - 2100 FR - 2100 CL/FR
BODRUM 2500 CL - 2400 FR - 2500 CL/FR

SUPERMARKET FREEZERS AND COOLERS

- Large useful capacity
- Large product facing area
- Reduced energy consumption by electronic controller
- Low investment and operating costs
- Maintenance-free refrigeration systems
- Installation in the market (stand alone - in a line up - in island)

SUPERMARKET FREEZERS AND COOLERS




INSTALLATION POSSIBILITY IN THE MARKET



Model		BODRUM 1850 CE CL	BODRUM 1850 CE FR	BODRUM 1850 CE CL / FR	BODRUM 1850 CL	BODRUM 1850 FR	BODRUM 1850 CL / FR
Temperature range	[°C]	0...+10	-18...-23	0...+10 / -18...-23	0...+10	-18...-23	0...+10 / -18...-23
Climate class	[25°C / % 60 R.H.]	3	3	3	3	3	3
Volume: net/gross	[l]	468 / 666	470 / 666	468 / 666	550 / 789	563 / 789	550 / 789
Weight: net/gross	[kg]	132 / 147	111 / 126	132 / 147	144 / 160	122 / 138	144 / 160
Internal dimension	[mm]	1720x720x525	1720x720x525	1720x720x525	1720x720x600	1720x720x600	1720x720x600
External dimension	[mm]	1856x858x815	1856x858x815	1856x858x815	1856x858x890	1856x858x890	1856x858x890
Packaging dimension	[mm]	1920x920x925	1920x920x925	1920x920x925	1920x920x1000	1920x920x1000	1920x920x1000
Loading capacity 20' cont. / 40' cont. / 13,6 truck	[pcs]	12 / 24 / 28	12 / 24 / 28	12 / 24 / 28	12 / 24 / 28	12 / 24 / 28	12 / 24 / 28
Power supply	[V / Hz]	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
Refrigerant		R404a / R290	R404a / R290	R404a / R290	R404a / R290	R404a / R290	R404a / R290

Model		BODRUM 2100 CL	BODRUM 2100 FR	BODRUM 2100 CL / FR	BODRUM 2500 CL	BODRUM 2500 FR	BODRUM 2500 CL / FR
Temperature range	[°C]	0...+10	-18...-23	0...+10 / -18...-23	0...+10	-18...-23	0...+10 / -18...-23
Climate class	[25°C / % 60 R.H.]	3	3	3	3	3	3
Volume: net/gross	[l]	641 / 912	653 / 912	641 / 912	786 / 1109	797 / 1109	786 / 1109
Weight: net/gross	[kg]	175 / 193	152 / 170	175 / 194	200 / 219	172 / 191	200 / 219
Internal dimension	[mm]	1970x720x600	1970x720x600	1970x720x600	2370x720x600	2370x720x600	2370x720x600
External dimension	[mm]	2106x858x890	2106x858x890	2106x858x890	2506x858x890	2506x858x890	2506x858x890
Packaging dimension	[mm]	2170x920x1000	2170x920x1000	2170x920x1000	2570x920x1000	2570x920x1000	2570x920x1000
Loading capacity 20' cont. / 40' cont. / 13,6 truck	[pcs]	10 / 22 / 24	10 / 22 / 24	10 / 22 / 24	8 / 16 / 20	8 / 16 / 20	8 / 16 / 20
Power supply	[V / Hz]	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
Refrigerant		R404a / R290	R404a / R290	R404a / R290	R404a / R290	R404a / R290	R404a / R290

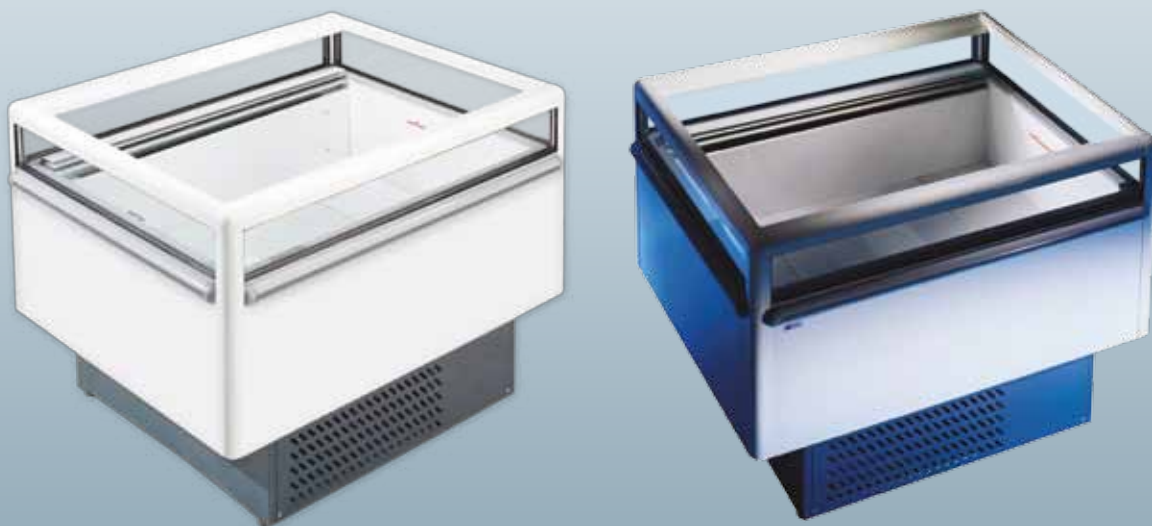

POOL TYPE SHOW CASE

- Available in 2 temperature range: +1...+10°C or -12...-22°C
- Excellent display for ice cream, frozen food and cold drinks with thermo glass and integrated lighting
- Powerfull air circulation allowing constant temperature with no-frost system
- Automatic defrost by electronic control
- 4 sides available for branding

POOL TYPE SHOW CASE



UHD 200 FR



UHD 200 CL

Model		UHD 200 CL	UHD 200 FR
Temperature range	[°C]	+1... +10	-12... -22
Climate class		3 (25°C / 60% RH)	3 (25°C / 60% RH)
Volume Net / Gross	[l]	165 / 200	165 / 200
Weight Net / Gross	[kg]	128 / 138	128 / 138
Internal dimension (WxDxH)	[mm]	705x1075x295	705x1075x295
External dimension (WxDxH)	[mm]	1015x1255x905	1015x1255x905
Ext. dim. with packing (WxDxH)	[mm]	1040x1280x1010	1040x1280x1010
Loadability: 20' cont. /40' cont. /13,6 truck	[pcs]	9 / 20 / 23	9 / 20 / 23
Power Supply	[V / Hz]	230 / 50	230 / 50
Refrigerant		R404a	R404a

UDR 7 B / UDR 7 BI / UDR 9 B / UDR 9 BI
UDR 12 B / UDR 18 B / UDD 400 SCER / UDD 7 SCE



UDR 7 B / UDR 7 BI / UDR 9 B / UDR 9 BI
UDR 12 B / UDR 18 B / UDD 400 SCER / UDD 7 SCE

ICE CREAM SHOW CASES

- *Excellent display for various of ice cream*
- *Tempered and heated serving glass*
- *Easy-to-move and heated serving glass*
- *Easy to mount and dismount the ice cream boxes*
- *Digital controller and automatic defrost system allowing constant temperature*
- *4 wheels for easy movement*
- *Optional panel with light*

ICE CREAM SHOW CASES



UDR 7 B
UDR 7 BI



UDR 9 B
UDR 9 BI



UDR 12 B



UDR 18 B



UDD 400 SCER



UDD 7 SCE

Options



Color body



Color body



Special casing



Branding



Serving glass

Model		UDR 7 B/BI	UDR 9 B/BI	UDR 12 B	UDR 18 B	UDD 400 SCR	UDD 7 SCE
Temperature range	[°C]	-12 ... -22	-12 ... -22	-12 ... -22	-12 ... -22	-12 ... -22	-12 ... -22
Climate class		4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)
Ice cream box volume	[l]	4,8	4,8	4,8	4,8	4,8	4,8
Number of ice cream box		7	18	24	36	7	7
Weight Net / Gross	[kg]	134 / 144	177 / 188	258 / 274	365 / 382	93 / 105	82 / 94
Internal dimension (WxDxH)	[mm]	1220x550x500	1535x550x500	990x760x225	1180x760x225	1180x495x708/610	1206x395x765/695
External dimension (WxDxH)	[mm]	1360x720x1250	1680x720x1250	1180x1200x1390	1725x1200x1390	296x615x949/829	1327x516x1018
Ext. dim. with packing (WxDxH)	[mm]	1380x780x1310	1750x780x1310	2500x1300x150	1785x1300x150	1400x750x1010	1410x630x1020
Loadability: 20' cont. / 40' cont. / 13,6 truck	[pcs]	12 / 25 / 28	9 / 19 / 22	4 / 9 / 10	4 / 9 / 10	12 / 27 / 45	32 / 64 / 80
Power Supply	[V / Hz]	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
Refrigerant		R404a	R404a	R404a	R404a	R404a	R404a

UDR 12 BARBAROS / UDR 12 BEYAZIT
UDR 12 YAVUZ / UDR 18 ERTUGRUL
UDR 12 KANUNI

NEW



UDR 12 BARBAROS / UDR 12 BEYAZIT
UDR 12 YAVUZ / UDR 18 ERTUGRUL
UDR 12 KANUNI

ICE CREAM SHOW CASES

- *Excellent display for various of ice cream*
- *Tempered and heated serving glass*
- *Easy-to-move and heated serving glass*
- *Easy to mount and dismount the ice cream boxes*
- *Digital controller and automatic defrost system
allowing constant temperature*
- *4 wheels for easy movement*

ICE CREAM SHOW CASES



UDR 12 BARBAROS



UDR 12 BEYAZIT



UDR 18 ERTUĞRUL



UDR 12 KANUNİ



UDR 12 YAVUZ

Model		UDR 12 BARBAROS	UDR 12 BEYAZIT	UDR 12 ERTUĞRUL	UDR 12 KANUNİ	UDR 12 YAVUZ	UDR 18 ERTUĞRUL
Temperature range	[°C]	-12/-22	-12/-22	-12/-22	-12/-22	-12/-22	-12/-22
Climate class		4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)	4(30°C / 55% RH)
Ice cream box volume	[l]	4,8	4,8	4,8	4,8	4,8	4,8
Number of ice cream box		24	24	24	24	24	36
Weight Net / Gross	[kg]	229/239	226/236	230/240	230/240	230/240	330 / 341
Internal dimension (WxDxH)	[mm]	990x760x225	990x760x225	990x760x225	990x760x225	990x760x225	1180x760x225
External dimension (WxDxH)	[mm]	1175x1130x1330	1175x1125x1330	1175x1130x1330	1175x1135x1330	1150x1135x1330	1725x1135x1330
Ext. dim. with packing (WxDxH)	[mm]	1200x1170x1450	1200x1170x1450	1200x1170x1450	1200x1170x1450	1200x1170x1450	1750x1170x1450
Loadability: 20' cont. /40' cont. /13,6 truck	[pcs]	4 / 9 / 10	4 / 9 / 10	4 / 9 / 10	4 / 9 / 10	4 / 9 / 10	4 / 9 / 10
Power Supply	[V / Hz]	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50



PASTRY DISPLAY CABINETS

- Perfect design with 4 sides tempered glass to display pastry
- Correct temperature for protecting the freshness of the pastry
- Attractive wooden covering for UPD 1
- Internal lighting and glass shelves for better display
- Self turning shelves
- Easy-to-move with wheels

PASTRY DISPLAY CABINETS



Model		UPD 1	UPD 1A	UPD 2	UPD 3
Temperature range	[°C]	+5... +10	+5... +10	+5... +10	+5... +10
Climate class		4 (30°C/55% RH)	4 (30°C/55% RH)	4 (30°C/55% RH)	4 (30°C/55% RH)
Volume Net / Gross	[l]	460 / 464	460 / 575	946 / 953	1413 / 1422
Weight Net / Gross	[kg]	170 / 176	205 / 215	310 / 320	370 / 385
External dimension (WxDxH)	[mm]	700x730x1790	775x805x1785	1380x730x1790	2010x700x1790
Ext. dim. with packing (WxDxH)	[mm]	750x770x1950	920x950x2050	1430x770x1950	2060x750x1950
Loadability: 20' cont. / 40' cont. / 13,6 truck	[pcs]	21 / 42 / 48	12 / 26 / 28	12 / 24 / 27	8 / 17 / 19
Glass Shelf	[pcs]	5	5	10	15
Power Supply	[V / Hz]	230 / 50	230 / 50	230 / 50	230 / 50
Refrigerant		R134a	R134a	R134a	R134a

UAM 10 / UAM 20 / UAM 40 / UAM 2x10
USM 10 / USM 20 / USM 40 / USM 60 / USM 80 / USM 2x10 / USM 3x10
USAM 10+10 / USAM 20+10 / USAM 20+20 / USAM 40+20 / USAM 60+20



UAM 10 / UAM 20 / UAM 40 / UAM 2x10
USM 10 / USM 20 / USM 40 / USM 60 / USM 80 / USM 2x10 / USM 3x10
USAM 10+10 / USAM 20+10 / USAM 20+20 / USAM 40+20 / USAM 60+20

COLD BEVERAGE DISPENSERS

- *Perfect display for beverages and buttermilk*
- *Available in various volumes suitable for both high and low density*
- *Transparent tank and steel body available for branding applications*
- *Separable parts allowing ideal cleaning*

COLD BEVERAGE DISPENSERS



USM 10



UAM 20



USM 20



USM 80



USAM 10+10



USAM 20+10



USAM 20+20



USAM 40+20



USAM 60+20

Model		UAM 10	UAM 20	UAM 40	UAM 2x10	USM 10	USM 20	USM 40	USM 60	USM 80	USM 2x10	USM 3x10	USAM 10+10	USAM 20+10	USAM 20+20	USAM 40+20	USAM 80+20
Temperature range	[°C]	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10	+5...+10
Climate class		4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)	4 (30°C/ 55% RH)
Volume Net / Gross	[l]	10/11	20/22	40/44	10/11	10/11	20/22	40/44	60/66	80/88	10/11	10/11	20/22	30/33	40/44	60/66	80/88
Weight Net / Gross	[kg]	20,5/22	22/24	31,5/33	29/31	21,5/23	23/25	32,5/35	44/47	51/55	31/33	40,5/43	30/32	39,5/42	32,5/34	43/46	51/55
External dimension (WxDxH)	[mm]	180x500x580	180x500x705	360x500x705	360x500x580	180x500x580	180x500x705	360x500x705	540x500x705	720x500x705	360x500x580	540x500x580	360x500x580	540x500x580	360x500x705	540x500x705	720x500x705
Ext. dim. with packing (WxDxH)	[mm]	280x580x670	280x580x780	460x580x780	460x580x670	280x580x670	280x580x780	460x580x780	640x580x780	820x580x780	460x580x670	640x580x670	460x580x670	640x580x670	460x580x780	640x580x780	820x580x780
Loadability: 20' cont./40' cont./13,6 truck	[pcs]	252/504/576	252/504/576	150/312/348	150/312/464	252/504/576	252/504/576	150/312/348	108/216/252	84/168/192	150/312/464	108/216/336	150/312/464	108/216/336	150/312/348	108/216/252	84/168/192
Power Supply	[V/Hz]	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
Refrigerant		R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a	R134a

UBM 30 / UBM 60 / UBM 100 / USS 85



USS 85 / UBM 30 / UBM 60 / UBM 100

WATER DISPENSER & ICE MAKERS

- *Direct cold water from the tap instantly*
- *Direct connection to water supply in USS 85*
- *Inner tank made of stainless steel/cromium-nickel*
- *3 different models for various need*
- *Direct connection to water supply*
- *Stainless steel external body*
- *Easy-to-access lid*
- *Direct connection to drainage*

WATER DISPENSER & ICE MAKERS



USS 85



UBM 30



UBM 60



UBM 100

Model		USS 85
Temperature range	[°C]	+5... +10
Climate class		4 (30°C / 55% RH)
Cold water capacity	[l/h]	-
Hot water capacity	[l/h]	-
Volume Net / Gross	[l]	57 / 75
Weight Net / Gross	[kg]	52 / 56
External dimension (WxDxH)	[mm]	640x415x1385
Ext. dim. with packing (WxDxH)	[mm]	640x480x1420
Loadability: 20' cont. /40' cont. /13,6 truck	[pcs]	42 / 86 / 105
Power Supply	[V / Hz]	230 / 50
Refrigerant		R134a

Model		UBM 30	UBM 60	UBM 100
Ice making capacity (Ambient temperature: 20°C and Water temperature: 15°C)	[kg/24h]	32	48	70...75
Ice capacity for one cycle	[pcs]	24	32	40
Weight of Ice	[g]	20...25	20...25	20...25
Ice storage capacity	[kg]	10...12	20...24	35...40
Number of storage ice	[pcs]	425	850	1450
Weight Net / Gross	[kg]	50 / 53	61 / 65	78 / 82
External dimension (WxDxH)	[mm]	525x605x680	600x555x880	680x555x1125
Ext. dim. with packing (WxDxH)	[mm]	570x680x710	620x600x925	700x600x1180
Loadability: 20' cont. /40' cont. /13,6 truck	[pcs]	96 / 204 / 240	54 / 120 / 168	54 / 120 / 152
Power Supply	[V / Hz]	230 / 50	230 / 50	230 / 50
Refrigerant		R134a	R134a	R134a





NOTES

