


External Dimensions (mm)

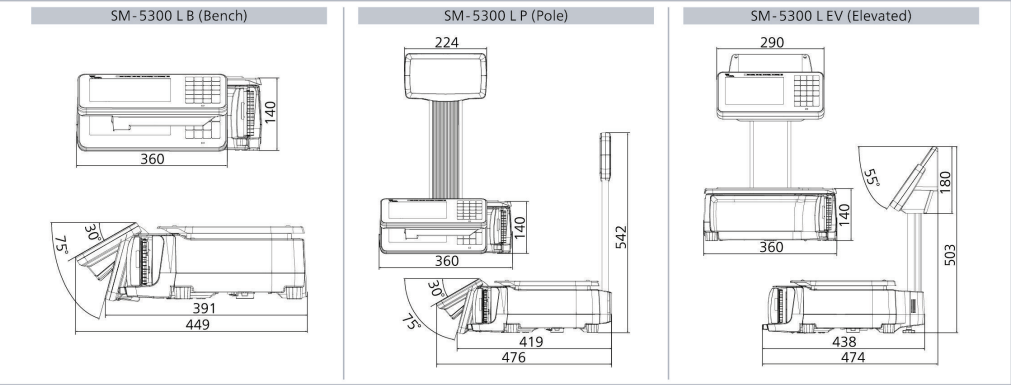

Specifications

Capacity		Max 6kg	Max 15kg / 30lb	Max 30kg
Single Interval	1 / 3,000 1 / 6,000 or 1 / 7,500	e = 2g e = 1g	e = 5g / 0.01lb e = 2g	e = 10g e = 5g
Capacity		Max 3 / 6kg	Max 6 / 15kg	Max 15 / 30kg
Multi Interval	1 / 3,000	e = 1 / 2g	e = 2 / 5g	e = 5 / 10g

Model	SM-5300 L B (Bench)	SM-5300 L P (Pole)	SM-5300 L EV (Elevated)
Dimension W×D×H(mm)	360 x 449 x 140	360 x 476 x 542	360 x 474 x 503
Operator Display 7" with Touch (800 x 480, TFT WVGA)	○	○	○
Customer Display 7" (800 x 480, TFT WVGA)	○	○	○
Display Resolution	1 / 3,000, 1 / 6,000 & 1 / 7,500		
Number of Preset Keys	23 Alphanumeric Function Keys		
Types	Liner	Linerless With Auto-Cutter	
Roll Diameter	125mm (Max)	95mm (Max)	
Label / Print Width	56mm (Max)	56mm (Max)	
Paper Width	70mm (Max)	62mm (Max)	
Printing Speed	120mm / second*	100mm / second*	
Print Resolution	200 dpi	200 dpi	
Power Source	AC 100 / 110 or 220 / 230 / 240 Volts (50 / 60 Hz) Auto Switch		
Operating Temperature	-10°C to +40°C		
Humidity	15% to 85% RH		
Standard Interface	Ethernet 10 / 100 Base T, 2 x USB 2.0		
Net Weight	10 kg	11 kg	12 kg

Options	Wireless LAN IEEE 802.11 a / b / g / n / ac, Base Station, eLabel with Hi-Touch, InfoTag, Queue Printer, NF-02, Speed ID & Wristband
Factory Option	Linerless Printer with Auto-Cutter

*To achieve maximum print speed, high sensitivity thermal paper is necessary.
** All the images are used for illustration purpose only.



• Specifications are subject to change without prior notice
• Meet or exceed OIML Class III requirements

TERAOKA SOUTH AFRICA (PTY) LTD
Unit 6, City Deep Industrial Park,
Fortune Street, City Deep,
Johannesburg, 2049
TEL : +27 11 613 4291
EMAIL : info@teraoka.co.za
URL: www.teraoka.co.za

TERAOKA SEIKO Co., Ltd.
13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580, JAPAN
TEL: +81-3-3752-2131
FAX: +81-3-3752-5562
URL: www.digisystem.com

SM-5300 L / C / 0720



SM-5300 L
PC Based System Scale Printer



Searching for a New Balance



Interactive Screens

Engage with your customers through the 7" TFT WVGA customer display screen that can display customised information.

- Upsell and Cross-sell
- Recipes
- Promotions and Advertisements

7" TFT WVGA Customer Display



Queue Management

SM-5300 L manages the queue, providing real-time queue status, allowing operators to react to customers' demand swiftly. Our Queue Management greatly enhances customers' overall shopping experience through managing their queue expectations.

- Single Department Queue
- Customise Queue Ticket



SM-5300 L P



Queue Printer

Linerless Labeling with Auto-Cutter

Create different label prints of variable lengths using a single label roll! Without the liner film sheet, the number of labels per roll for print will increase significantly, thus minimises operational downtime while changing label rolls.

- Reduce label & logistics cost
- Reduce wastage
- Eco-friendly
- Increase operation efficiency



Watermark Printing

Maximise your branding mileage and make the product labels more attractive with the variable use of creative effects through watermark printing.

Automatic Clerk Identification

Capitalise on the near field identification feature to eliminate the process of the manual entering of clerk password. Our unique Speed ID feature offers a hassle-free user login and prevents unauthorised access. The scale captures all operator activities and it can be used for multiple purposes.

- Data analysis & maintenance
- Menu items maintenance
- PLU & inventory reports
- Daily, monthly & quarterly sales reports



Waistband



Traceability, Security & Networking

Prevent unauthorised access or administration with features such as:

- Audit Trail
- Date and Time Stamp
- Wireless Network Security (WPA / WEP / LEAP)
- Price Override Lock
- Password Protection

eLabel.. with Hi-Touch

Utilising tap sensor technology, the Hi-Touch feature allows operators to readily call up the correct PLU code at ease. Focus on your customers and let Hi-Touch do the rest.

- Wireless remote preset keys
- Reduce pricing errors
- Operations efficiency
- High contrast ePaper display
- IP-67 rating

3-Step Operation



Accurate Waste Tracking

Track and measure food waste accurately by segregating its data according to waste types, quantities or even reasons and locations of disposal.

- Drive sustainability by cutting down on unplanned food waste
- Optimise procurement planning and protect profitability

DMC DIGI Management Console

DMC allows users to remotely manage label design and scale data in real-time while gaining easy access to sales reports and other remote services such as network wide configuration and software updates. It also comes with a dashboard-style overview to monitor scale and printer status at a glance.

- Increase operational agility
- Reduce downtime

InfoTag.. Electronic Shelf Label

Pricing updates, revision of promotional text and product information can be instantaneously displayed on InfoTag via the wireless base station.

- Seamless & user-friendly
- Operations efficiency
- Quick wireless update
- Price integrity

